


KJ Filtration

Material Specification Sheet

Media Type: TB60

Color		White	
Total Media Weight	【g/m²】	75 ± 8	
Electret Weight	【g/m²】	60 ± 6	
Scrim Weight	【g/m²】	15 ± 2	
Media Thickness	【mm】	1.60 ± 0.1	
Air Permeability (@12.7 mmAq)	【L/sec/m²】	>2218	
(@0.5 In. W.G.)	【cfm/ft²】	>436	
Filtration Efficiency	【%】	85	32 lpm
(0.3 μm @ TSI8130)		0.15	mmAq

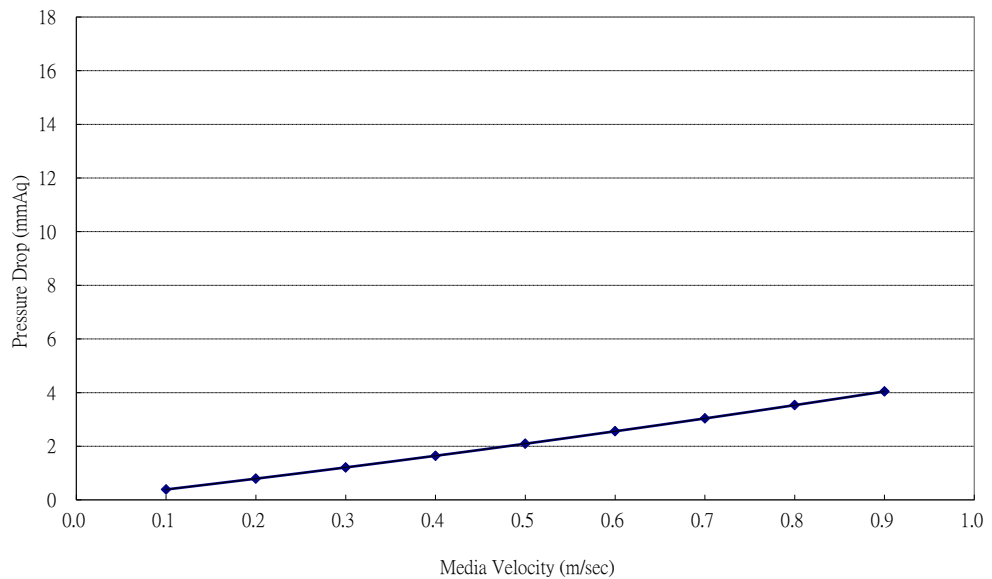


Last Revision : Jan-09-2015

KJ Filtration

Material Specification Sheet

Media Type: TB65

Color		White	
Total Media Weight	【g/m²】	80 ± 9	
Electret Weight	【g/m²】	65 ± 7	
Scrim Weight	【g/m²】	15 ± 2	
Media Thickness	【mm】	1.65 ± 0.1	
Air Permeability (@12.7 mmAq)	【L/sec/m²】	>2084	
	(@0.5 In. W.G.) 【cfm/ft²】	>410	
Filtration Efficiency	【%】	87	32 lpm
(0.3 μm @ TSI8130)		0.16	mmAq

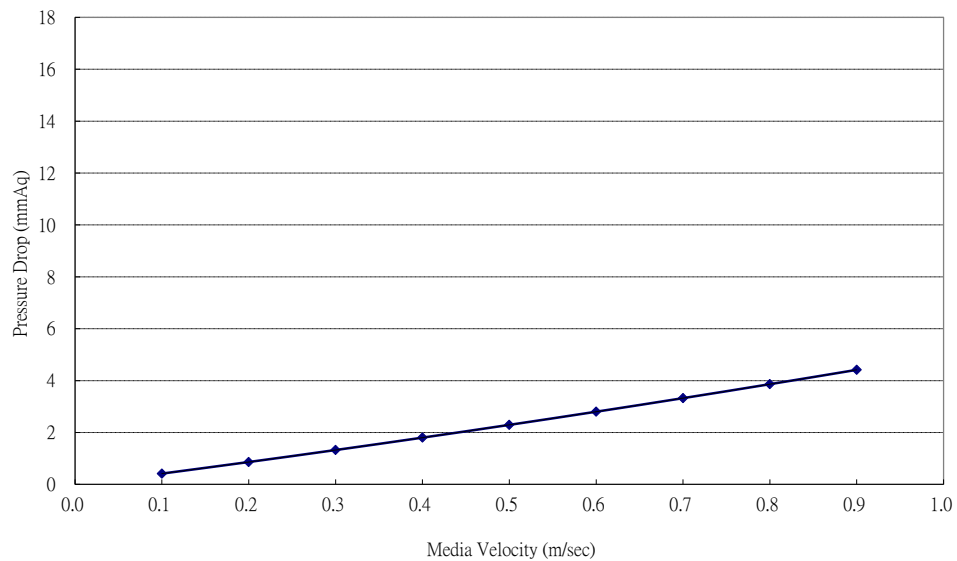


Last Revision : Jan-09-2015

KJ Filtration

Material Specification Sheet

Media Type: TB80

Color		White
Total Media Weight	【g/m²】	95 ± 10%
Electret Weight	【g/m²】	80 ± 10%
Scrim Weight	【g/m²】	15 ± 10%
Media Thickness	【mm】	2.0 ± 0.1
Air Permeability (@12.7 mmAq)	【L/sec/m²】	>1550
(@0.5 In. W.G.)	【cfm/ft²】	>305
Filtration Efficiency	【%】	92
(0.3 μm @ 32 LPM)		
Pressure Drop @32 LPM	【mmAq】	0.43
	【in】	0.017

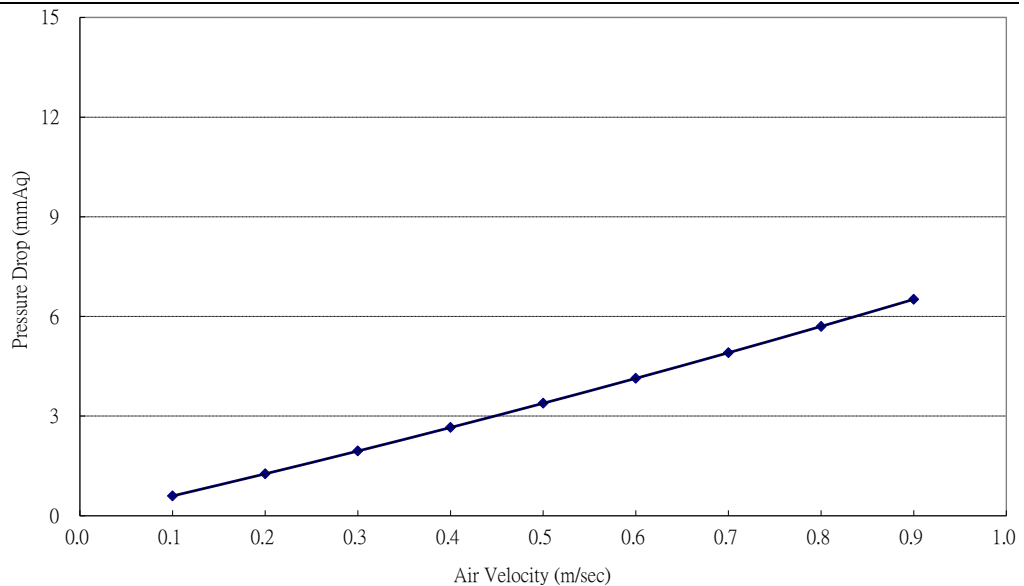


Last Revision : May-10-2017

KJ Filtration

Material Specification Sheet

Media Type: TB90

Color		White	
Total Media Weight	【g/m²】	105 ± 11	
Electret Weight	【g/m²】	90 ± 9	
Scrim Weight	【g/m²】	15 ± 2	
Media Thickness	【mm】	2.0 ± 0.1	
Air Permeability (@12.7 mmAq)	【L/sec/m²】	>1624	
(@0.5 In. W.G.)	【cfm/ft²】	>319	
Filtration Efficiency	【%】	95	32 lpm
(0.3 μm @ TSI8130)		0.34	mmAq

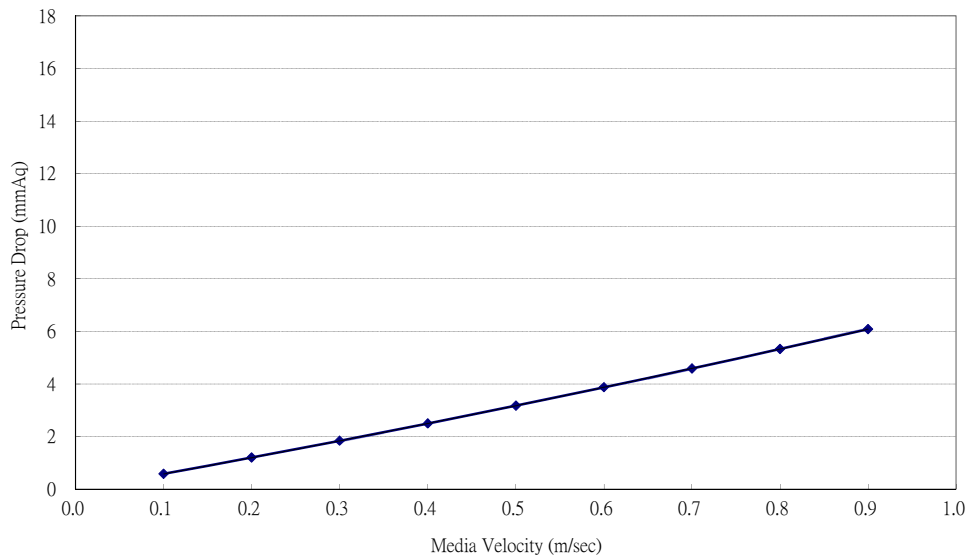


Last Revision : Jan-09-2015

KJ Filtration

Material Specification Sheet

Media Type: TB100

Color		White	
Total Media Weight	【g/m²】	115 ± 12	
Electret Weight	【g/m²】	100 ± 10	
Scrim Weight	【g/m²】	15 ± 2	
Media Thickness	【mm】	2.1 ± 0.1	
Air Permeability (@12.7 mmAq)	【L/sec/m²】	>1416	
	(@0.5 In. W.G.) 【cfm/ft²】	>278	
Filtration Efficiency	【%】	97	32 lpm
(0.3 μm @ TSI8130)		0.37	mmAq

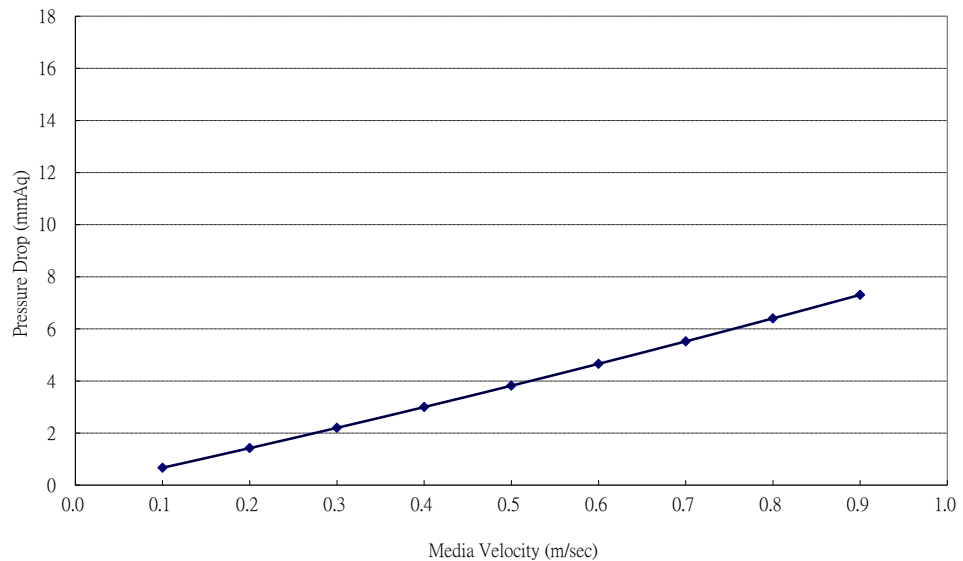

Last Revision : Jan-28-2015